
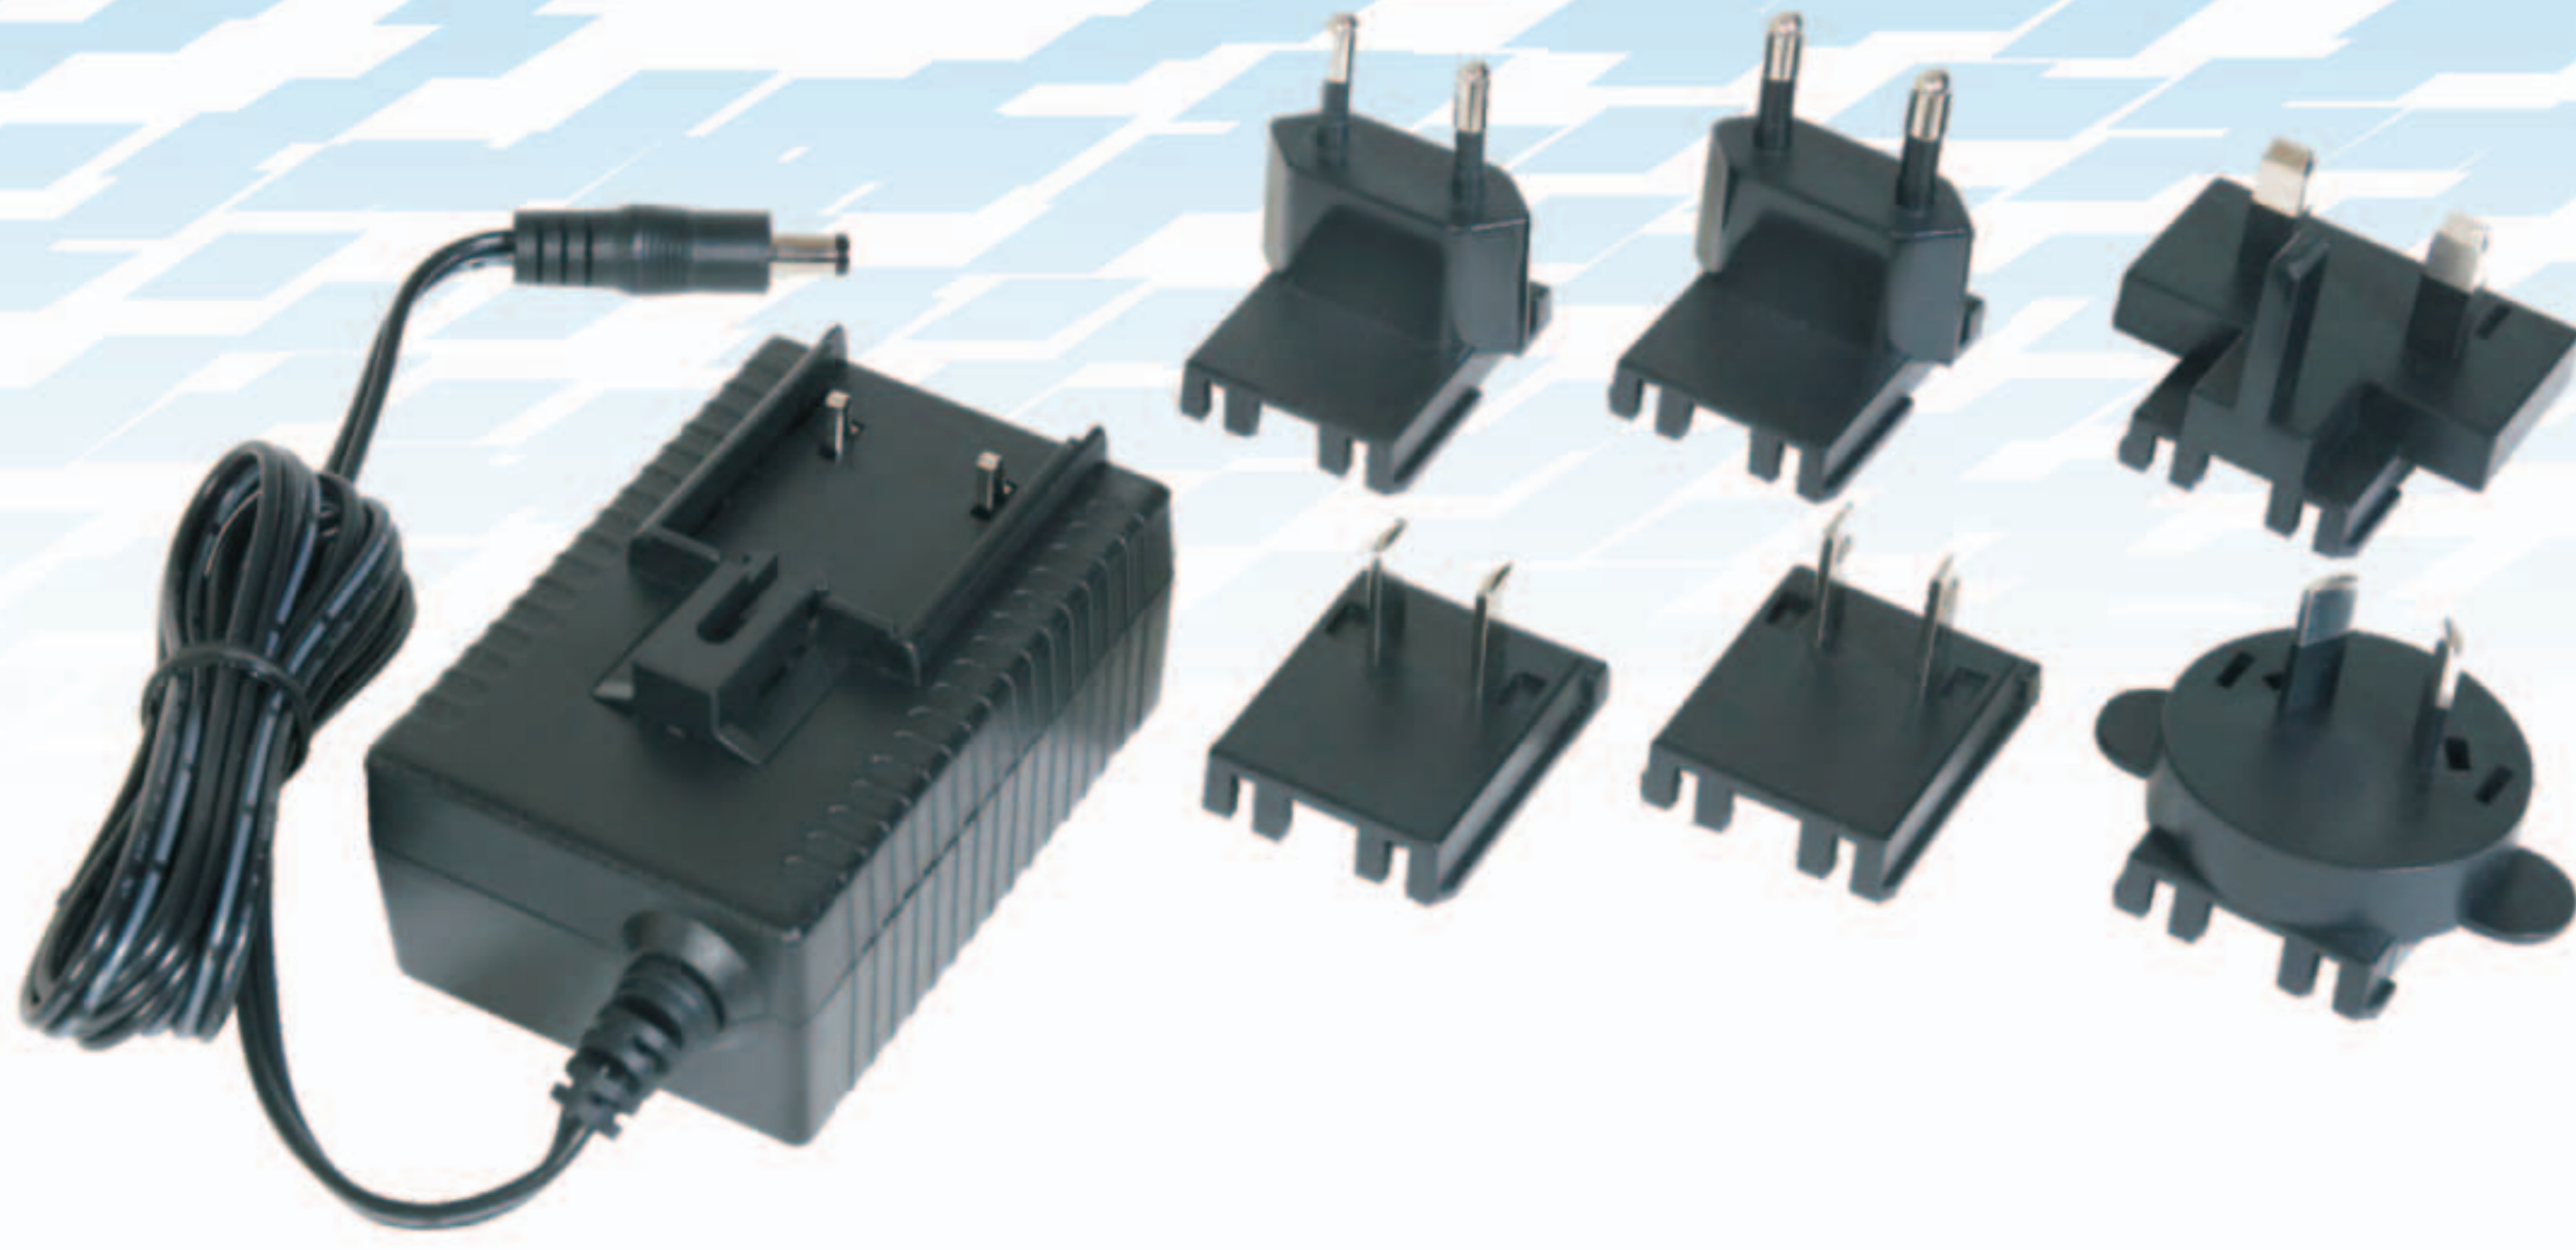


18 Watt Series

AC Prong Changeable
Wall Mount Type

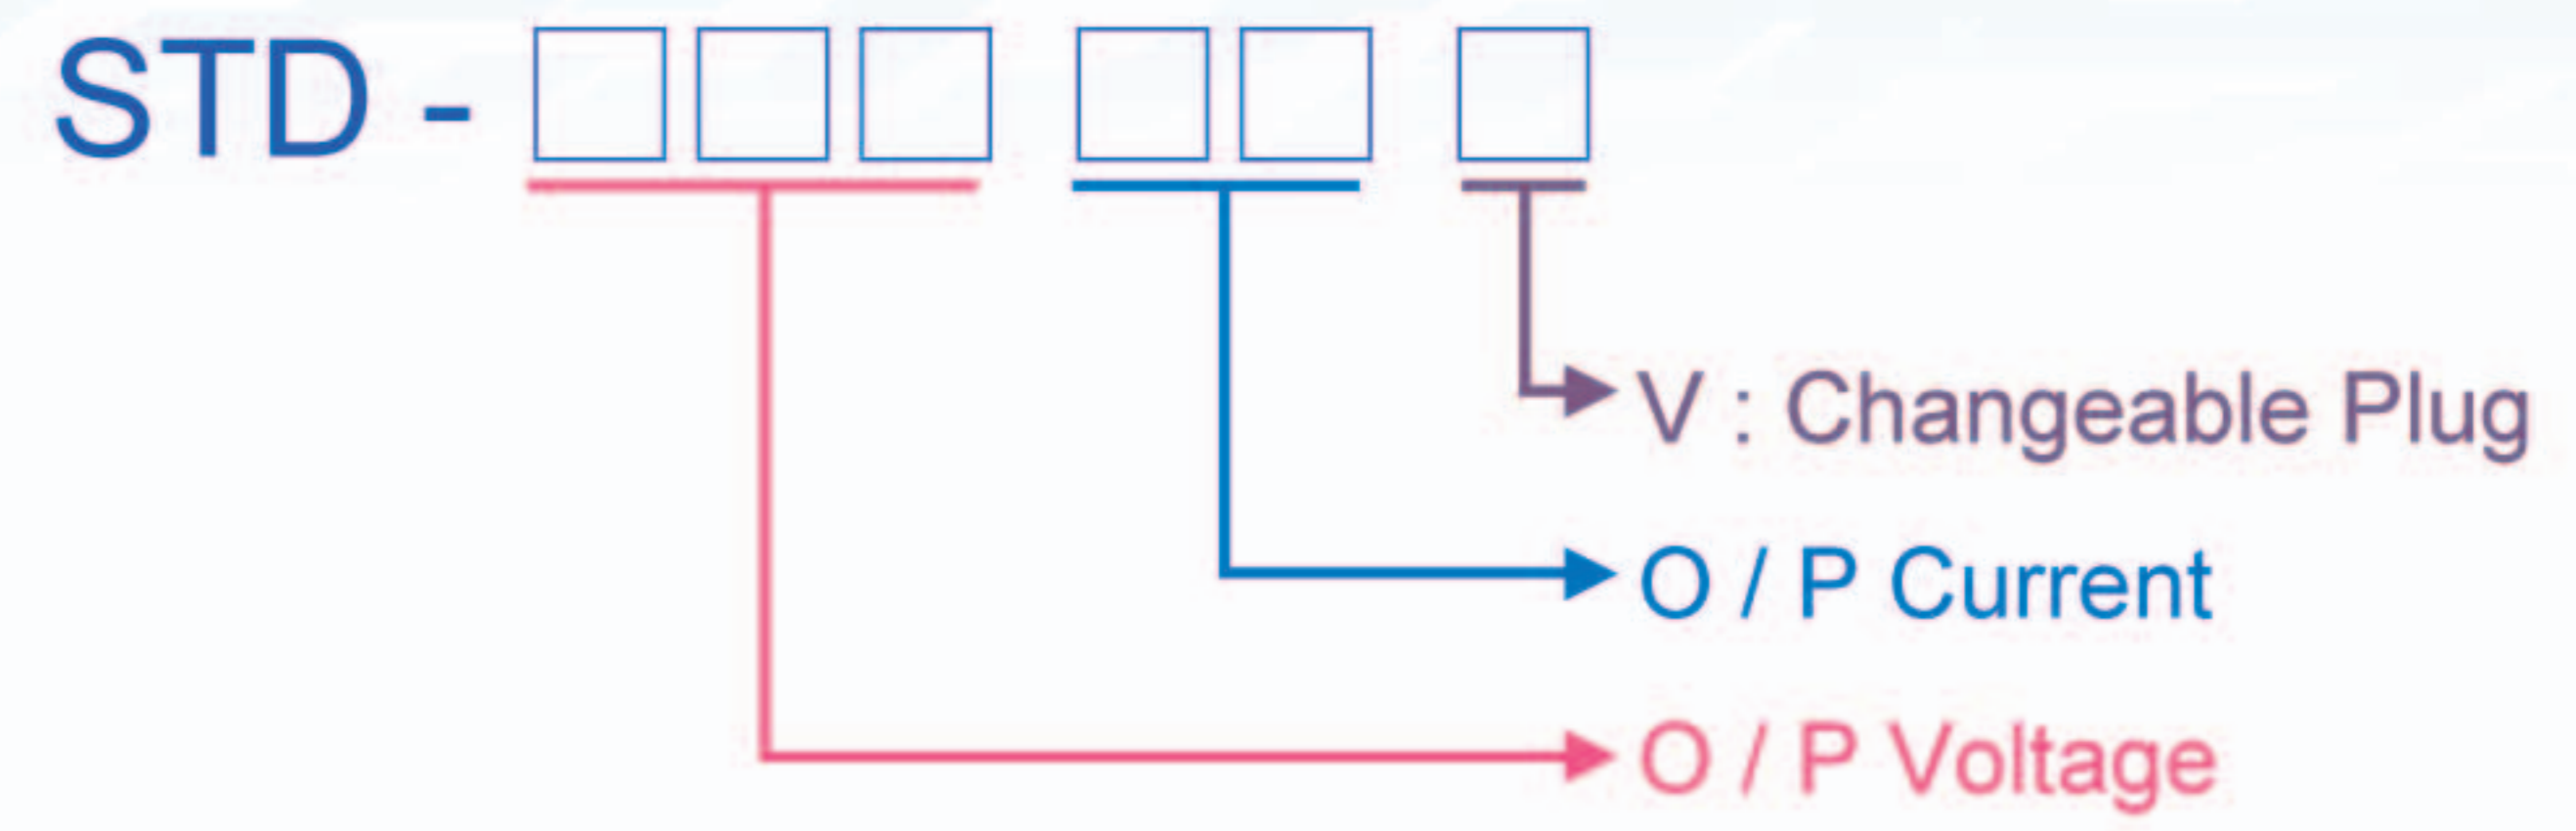

Green Mode

CEC , Energy Star Level V , ErP Stage 2 , NRCan & GEMS
No Load Power Consumption Less Than 0.3W

Features :

- 100-240VAC Universal Input
- Single Output to 18W
- Wall Mount Changeable Plug with Option of Various Plugs
- Regulated Output with Low Ripple Noise
- Safety Agency Requirements and EMI/EMS Certified
- Private Label Marking Available
- Modified and Custom Design Available
- 1 Year Warranty

Output

Load Regulation	± 5% (Typical)
Ripple	1~2% Vp-p Max. for Output Voltage @ Full Load
Transient Response	0.5mS for 50% Load Change Typical
Holdup Time	10mS @ Full Load
Protection	Short Circuit Protection/ Over Voltage Protection/ Over Current Protection
DC Cord	22AWG / 20AWG / 18AWG
Ferrite Core	No (Optional)

Safety Approvals

For USA- CB/ UL/ cUL/ FCC/ PSE/ BSMI/ LPS
For Europe- CB/ GS/ CE/ LPS
For UK- CB/ CE/ LPS
For Australia- CB/ RCM/ LPS
For China- CB/ CCC/ LPS
For Korea- CB/ KC/ LPS

(*) With KC mark

Electrical

Topology	Switching Flyback
Dielectric Withstand	3,000VAC Primary - Secondary
Leakage Current	0.25mA @ 2 Pin
Efficiency	Energy Star Level V ,ErP Stage 2 ,GEMS & NRCan Certified
EMI Conduction & Radiation	Compliance to EN55022 Class B
Harmonic Current	Compliance to EN61000-3-2,3
EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11
MTBF	300,000 Calculated Hours at 25°C, by Telcordia SR-332

Environmental

Operating Temperature	0 to +40°C
Storage Temperature	-20 to +80°C
Relative Humidity	Operating: 20 to 80% RH Storage: 10 to 90% RH
Cooling	Natural Convection Cooling

Mechanical

Case Dimension	L78 x W52 x H41 (mm)
Weight	158g (Ref.)

Model	O/P Voltage	O/P Current	Watt
STD-04535V	4.5V	3.5A	15.75 W
STD-05025V	5.0V	2.5A	12.50 W
STD-05030V(*)	5.0V	3.0A	15.00 W
STD-05035V	5.0V	3.5A	17.50 W
STD-06025V(*)	5.9V	2.5A	14.75 W
STD-06030V(*)	5.9V	3.0A	17.70 W
STD-07025V(*)	7.0V	2.5A	17.50 W
STD-07525V	7.5V	2.5A	18.75 W
STD-09015V	9.0V	1.5A	13.50 W
STD-09022V	9.0V	2.2A	19.80 W
STD-10019V	10.0V	1.9A	19.00 W
STD-12012V	12.0V	1.2A	14.40 W
STD-12016V	12.0V	1.6A	19.20 W
STD-13510V	13.5V	1.0A	13.50 W
STD-13514V	13.5V	1.4A	18.90 W
STD-15010V	15.0V	1.0A	15.00 W
STD-15013V	15.0V	1.3A	19.50 W
STD-16010V	16.0V	1.0A	16.00 W
STD-16012V	16.0V	1.2A	19.20 W
STD-18008V	18.0V	0.8A	14.40 W
STD-18011V	18.0V	1.1A	19.80 W
STD-20007V	20.0V	0.7A	14.00 W
STD-20010V	20.0V	1.0A	20.00 W
STD-24006V	24.0V	0.6A	14.40 W
STD-24008V	24.0V	0.8A	19.20 W

Input

Voltage	100-240VAC
Line Frequency	50-60Hz
Current	0.48A Max.
Protection	Internal Primary Current Fuse, Inrush Limiting
Configuration	U for US AC Pin E for EU Pin B for UK Pin A for AU Pin C for CN Pin K for KR Pin



JET LPS



R33154 RoHS 6