



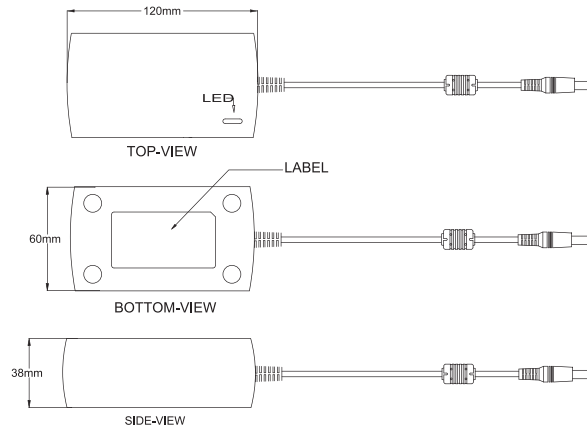

ADAPTER-36W/48W/60W



FEATURE

	36W	48W	60W
Desktop: IEC 320	C14	C14	C6,C8,C14
Input Range Voltage: 90~264 Vac, 47~63Hz	v	v	v
Output power	36watt max.	48watt max.	60 watt max.
Efficiency 80% typical	v	v	v
Short Circuit Protection	v	v	v
Over Voltage Protection	v	v	v
Leakage current: less than 3.5 mA	v	v	C6,C14
Leakage current: less than 0.25 mA	x	x	C8
Load Regulation ±5%	v	v	v
M.T.B.F. : 50,000 hours min. at 25°C, full load	v	v	v
Cable type	UL1185 / 18AWG	UL1185 / 18AWG	UL1185 / 16, 18AWG
Dimension: 120(L) x 60(W) x 38(H) mm	v	v	v
Weight: (reference)	300 g	300 g	325 g

APPLICATION

LCD Monitor, Notebook, Printer, Portable device	v	v	v
---	---	---	---

SAFTY & EMI

Safty	UL, cUL, GS, PSE, BSMI, CSA, 3C	UL, cUL, GS, PSE, BSMI, CSA, N, 3C	UL, cUL, GS, PSE, BSMI 3C
EMI: CE/FCC Class B, Conduction & Radiation MEET	v	v	v

ENVIRONMENTAL

Operating Temperature: 0~ + 40°C	v	v	v
Storage Temperature: - 20~ + 60°C	v	v	v
Relative Humidity: Operating 20~80%RH	v	v	v
Storage: 10~ 90%RH	v	v	v

RULE OF THE MODEL NAME

MODEL NAME (36Watt)/(48Watt)	O/P VOLTAGE	O/P CURRENT	WATT
STD-1203	12V	3.0V	36W
STD-1204	12V	4.0A	48W
MODEL NAME (60Watt)	O/P VOLTAGE	O/P CURRENT	WATT
STD-1205	12V	5.0A	60W
STD-1504	15V	4.0A	60W

MODEL NAME (60Watt)	O/P VOLTAGE	O/P CURRENT	WATT
STD-1638	16V	3.8A	60W
STD-1834	18V	3.4A	60W
STD-1932	19V	3.2A	60W
STD-2003	20V	3.0A	60W
STD-2227	22V	2.7A	60W
STD-2425	24V	2.5A	60W
STD-2425AF	24V	2.5A	60W(CEC)